


Core:- 54mm Strebord
Configuration:- Pair
Action:- Single Action
Vision Panel:- NA
UKAS Test House :- SRL Technical Services Limited
Certificate Number:- C/21290/R01
Test Number:- 030

Acoustic Rating:- Rw 33dB

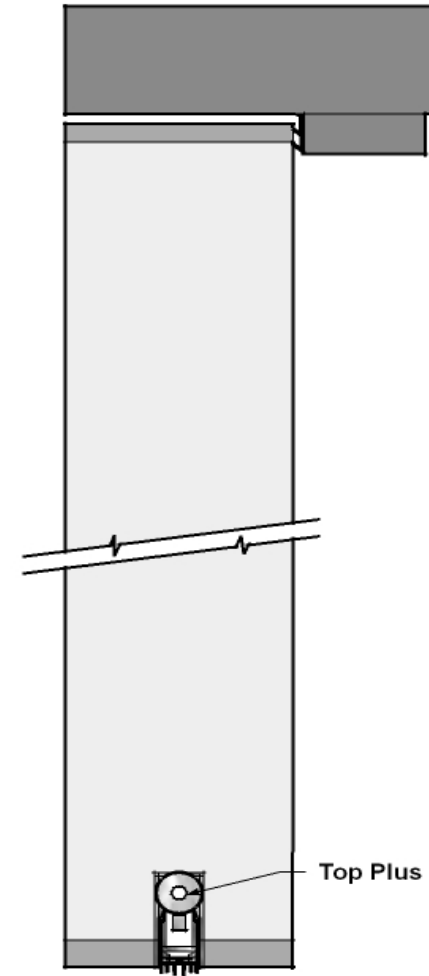

Please Note:-


Drawings are for indication of acoustic's only not fire, the correct configuration of fire seals must be added to achieve the required fire rating for the core.

Above drawings are indicative only

Test Number 30

Test Number :	30	Air temperature:	19.2 °C
Client:	Midland Building Products Ltd	Air humidity:	62 %
Test Date:	12/08/2010	Receiving room volume	300 m3
Sample height:	1.975 m	Source room volume:	115 m3
Sample width:	0.886 m	Sample weight:	32 kg/m2
Product	Pair Strebord 54mm		
Identification:	FAS 35 perimeter seal		
	FAS 45 Automatic drop-down seal		
	FAS Single action meeting stile seal		

Freq f Hz	Sound Reduction Index, dB	
	1/3 Oct	1/1 Oct
50+	20.2	21.5
63+	26.0	
80+	20.3	
100	22.8	25.6
125	28.3	
160	28.4	
200	27.0	29.3
250	29.9	
315	32.5	
400	32.7	32.5
500	33.0	
630	31.9	
800	30.3	30.8
1000	30.4	
1250	32.0	
1600	32.3	33.4
2000	33.1	
2500	35.6	
3150	35.2	35.5
4000	35.4	
5000	35.9	
6300+	38.6	40.3
8000+	40.7	
10000+	42.2	
Average 100-3150	31.0	Version v1.7

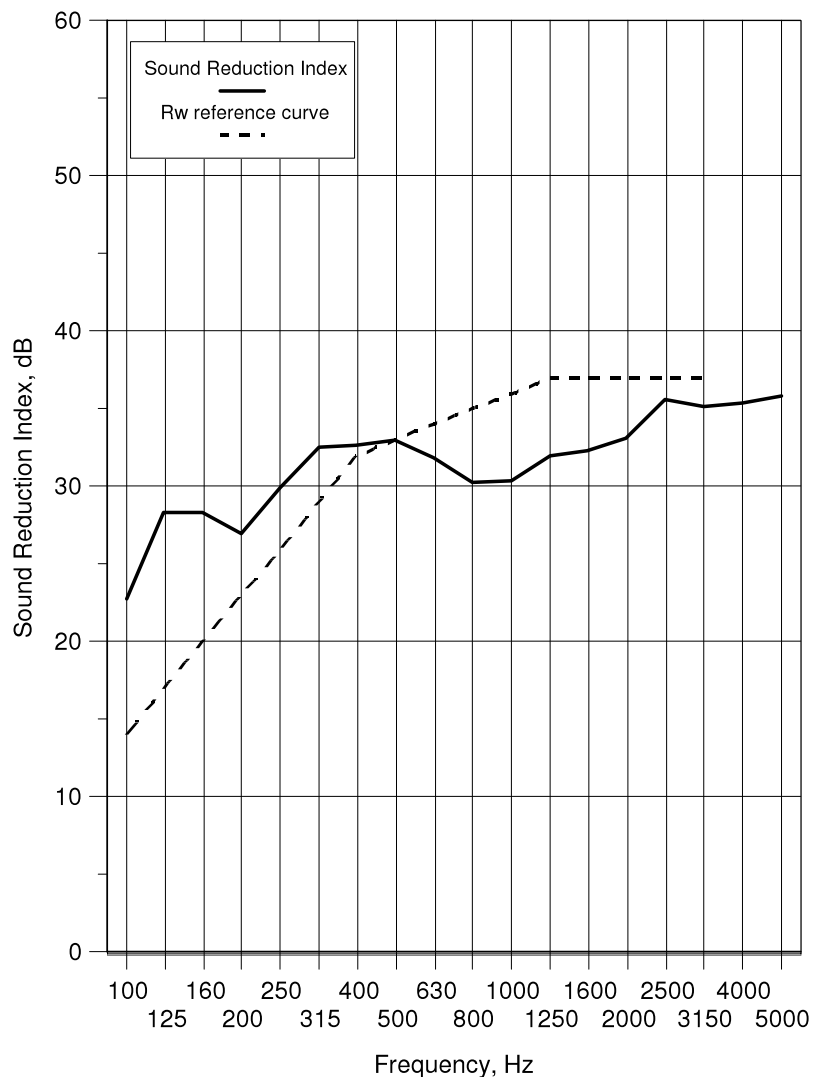

Rating according to BS EN ISO 717-1:1997
 Rw(C;Ctr)= **33 (-1;-2) dB**

* shows measurement corrected for background
 # shows limit of measurement due to background
 + shows frequency beyond standard and not UKAS accredited